



Electrical diagram

For lights with Non-Duo

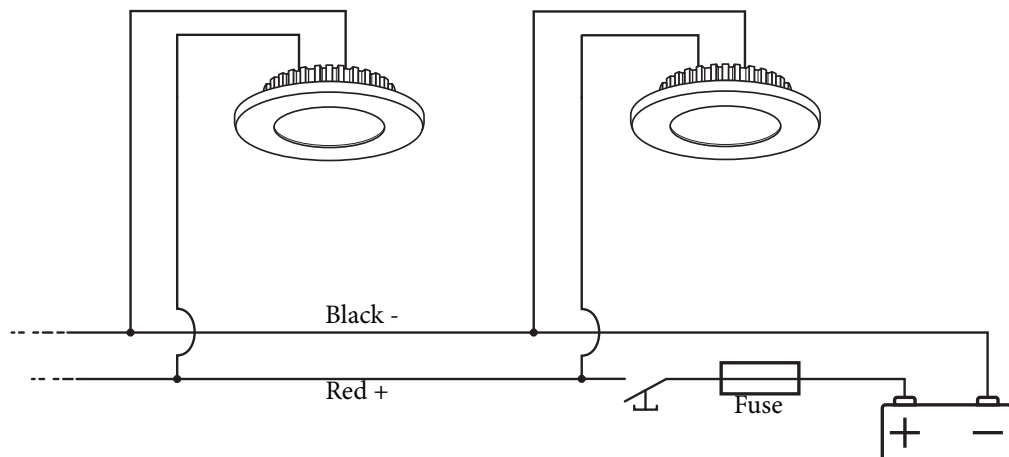

For lights with Duo

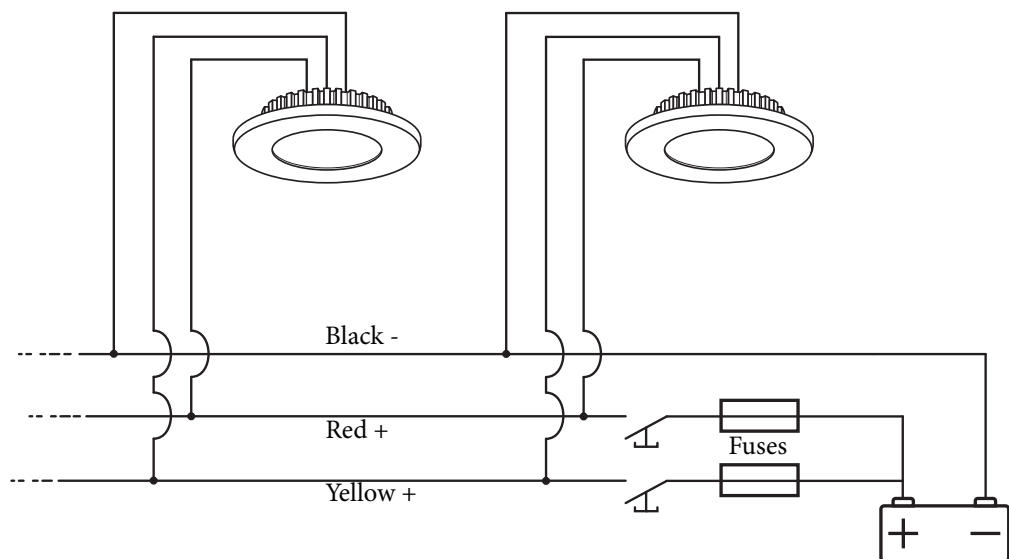

CASOLUX®

The lights of tomorrow


MAJA

Downlight / Surface Mounted


Assembly instruction

Item	Power	Input
MAJA-ROUND-(SS / SS-WH)	3,6w	10-32V DC
MAJA-ROUND-DUO-(SS / SS-WH)	3,6w/1,8w	10-32V DC
MAJA-SQUARE-(SS / SS-WH)	3,6w	10-32V DC
MAJA-SQUARE-DUO-(SS / SS-WH)	3,6w/1,8w	10-32V DC
MAJA-SUR-(SS / SS-WH)	3,6w	10-32V DC
MAJA-SUR-DUO-(SS / SS-WH)	3,6w/1,8w	10-32V DC

Downlight

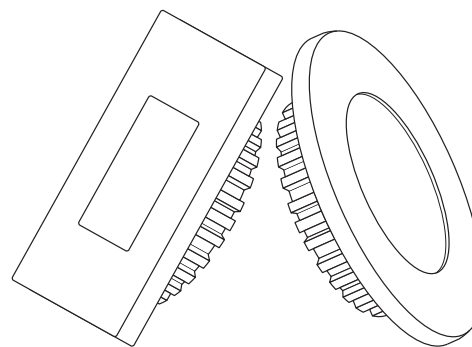

Surface Mounted

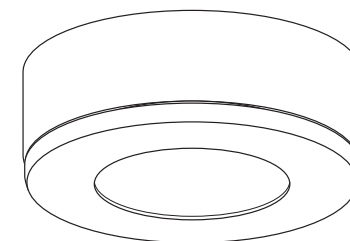

BEFORE YOU START

Safety information

Read all safety information before using the device to ensure safe and proper use.

The lamp can be installed directly into the insulation or similar material, without an extra security box.

The light source of this light fixture is not replaceable, when the light source reaches its end of life the whole unit shall be replaced.

It is extremely important that these instructions are read carefully, and any illustrations studied before commencing installation.

Please keep these instructions for future reference.

WARNING!

- Electricity can be dangerous.
- Do not attempt to fit installation unless you are competent.
- If in any doubt consult a qualified electrician to complete electrical installation.
- Installation to comply with current IET wiring regulations.
- If you find any damage to the electrical parts, please ask a qualified electrician.
- Be aware of electrical voltage on the different models to avoid damage.

Correct disposal



This marking indicates that this item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal.


Cleaning Instructions and Care

- Please disconnect the light before cleaning.
- Take extra care when cleaning and assembling.
- Do not use any chemical or abrasive solutions.

Installation


- Take care when handling and installing to avoid damage to the product.
- Avoid mounting the fitting on a damp surface such as newly painted or plastered area as this could cause discoloration of the finish.

General Assembly (Downlight)




1. Cut out a hole in the ceiling that fits the size of your light.

If using screws:
screw off the front of the light from the bracket.




3. If using springs:
Press the springs backwards and insert the light into the hole.

If using screws:
Screw in the mounting bracket using the included screws.




2. Connect the light to electricity according to the electrical diagram.




4. If using springs:
Adjust the position of the light and make sure it is well locked to finish installation.

If using screws:
Screw the front back on to the bracket to finish installation.


General Assembly (Surface mounted)




1. Prepare for mounting by drilling 2 holes for the screws and 1 for routing the cables through. Separate the light from the base by pressing on the bottom of the light.



3. Route the cables from the light through the base and hole. Connect the light according to the electrical diagram.



2. Screw in the base to the ceiling.



4. Press the light into the base, stop when you hear a "Click".