

LED - Flex Small

DK

IP68
[5m]





Effekt forbrug
10 w/m

Ydelse
750Lm/m

Levetid
50.000 timer
(L70%)

Strømforsyning
12-24 VDC

Materiale
PU

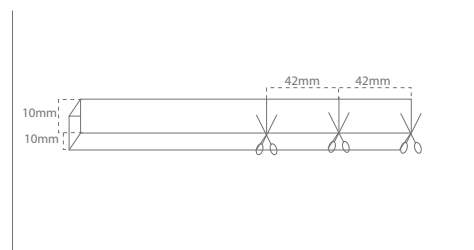

Varenavn	Lumen	Spredning	Effekt forbrug	Farvetemperatur	RA-værdi
CALL12-24VDC-10x10MM-WW	750 lm/m	120°	10 w/m	3000 K	> 80
CALL12-24VDC-10x10MM-CW	800 lm/m	120°	10 w/m	4500 K	> 80
CALL12-24VDC-10x10MM-RGB	400 lm/m	120°	10 w/m	RED - GREEN - BLUE	> 80

Egenskaber

- Fleksibel og afkortbar led moduler
- IP68 design med integreret varmestyring for lang levetid
- Højkvalitets fremstilling sikrer perfekt pasform hvilket sikrer lang levetid
- Jævnt lys uden skygger

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri
- Kan afkortes for hver 4,2 cm

Anvendelse

- Marine belysning