

Casolux Marine light

Marine light system

MARY FLEX MINI

DK

IP44



Effekt forbrug
1,5 w

Ydelse
93 Lm/w


Levetid
40.000 timer
(L70%)

Strømforsyning
10-30 VDC

Materiale
Aluminium.
Rustfrit stål.



Rustfrit stål (SS)

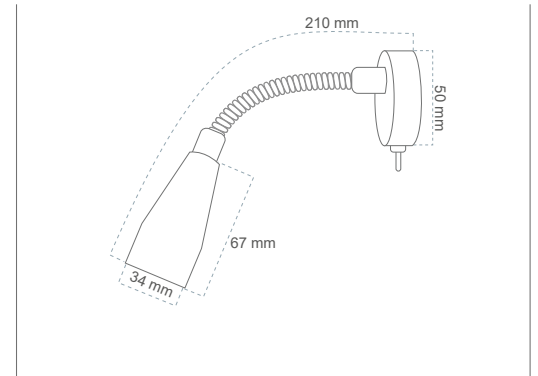

Grå (GR)



Sort (BL)



Titan (TI)

Varenavn	Lumen	Spredning	Effekt forbrug	Farvetemperatur	RA-værdi	LED fabrikat
MARY-SS-FLEX-mini	140 lm	40°	1,5 w	3000	> 83	CREE
MARY-AL-GR-FLEX-mini	140 m	40°	1,5 w	3000	> 83	CREE
MARY-AL-BL-FLEX-mini	140 lm	40°	1,5 w	3000	> 83	CREE
MARY-AL-TI-FLEX-mini	140 lm	40°	1,5 w	3000	> 83	CREE

Egenskaber

- Rustfrit stål (316) / Anodiseret aluminium sikre korrosion frit produkt i fugtige omgivelser
- Kraftigt lys til marine belysning
- IP44 design med integreret varmestyring for lang levetid
- Høj kvalitets fremstilling sikrer perfekt pasform hvilket sikrer lang levetid

Materiale

- SS: Aisi 316 rustfrit stål
- Anodiseret aluminium
- Flex: Forkromet messing

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri

Anvendelse

- Marine belysning