

MARY WALL USB/TOUCH

DK

IP44



Effekt forbrug
1,5 w

Ydelse
93 Lm/w

Levetid
50.000 timer
(L70%)

Strømforsyning
10-30 VDC


Materiale
Aluminium
SS: Aisi 316



Rustfrit stål (SS)

Grå (GR)

Sort (BL)

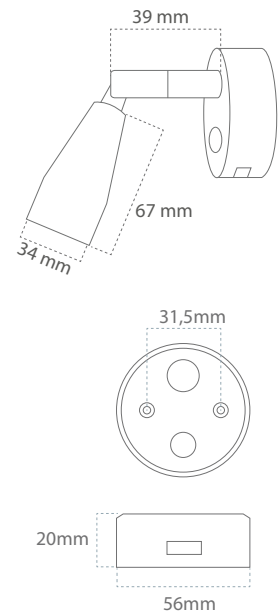

Varenavn	Lumen	Spredning	Effekt forbrug	Farvetemperatur	RA-værdi	LED fabrikat	USB Output
MARY-SS-WALL-TOUCH	140 lm	40°	1,5 w	3000 K	> 83	CREE	5V, 2Am
MARY-AL-GR-WALL-TOUCH	140 lm	40°	1,5 w	3000 K	> 83	CREE	5V, 2Am
MARY-AL-BL-WALL-TOUCH	140 lm	40°	1,5 w	3000 K	> 83	CREE	5V, 2Am

Egenskaber

- Rustfrit stål (316) / Anodiseret aluminium sikre korrosion frit produkt i fugtige omgivelser.
- IP44 design med integreret varmestyring for lang levetid
- Tændes ved "touch" funktion i lampe fod
- Leveres med usb oplader i lampefod

Materiale

- SS: Aisi 316 rustfrit stål
- GR, BL: Anodiseret aluminium
- Arm: Forkromet messing

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri

Anvendelse

- Marine belysning