

IP67








Power
7,6 / 8,5 w/m

Efficiency
181 Lm/m

Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
12 / 24 VDC

Material
Milky White PU

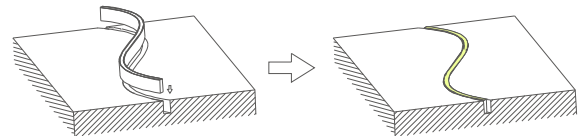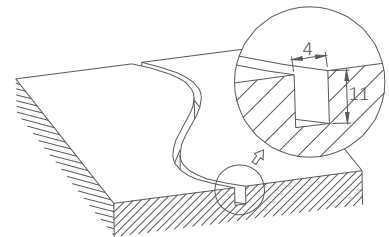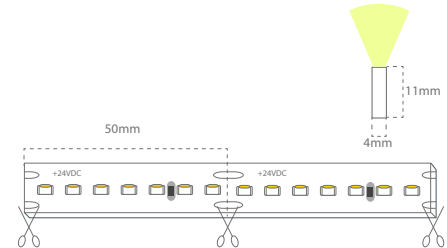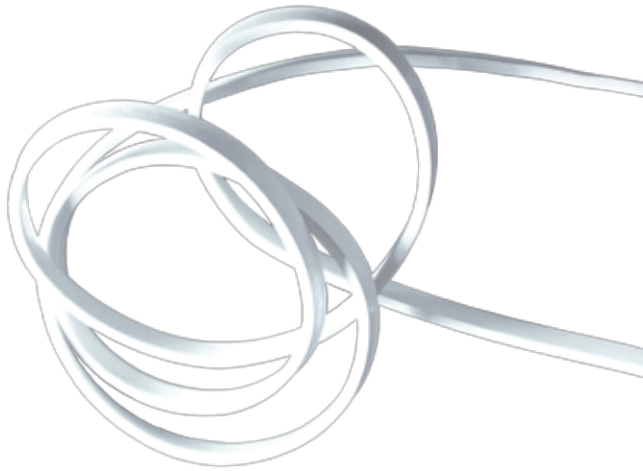

Product code	Lumen output	Beam	Power	Volt	CCT	CRI
CALL24VDC MILKY SIDEWAY	181 lm/m	60°	8,5 w/m	24 VDC	3000 K	> 80
CALL12VDC MILKY SIDEWAY	181 lm/m	60°	7,6 w/m	12 VDC	3000 K	> 80

Feature

- Flexible and cuttable line led module
- IP67 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life

Benefit

- High reliability
- Maintenance free
- Cut option for every 5 cm

Application

- Marine light