

IP54



Power
0,5 - 2 w

Efficiency
85 Lm/w

Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
12 VDC
24 VDC


Material
Stainless steel



MALENE TOUCH WALL



MALENE TOUCH WALL-MINI

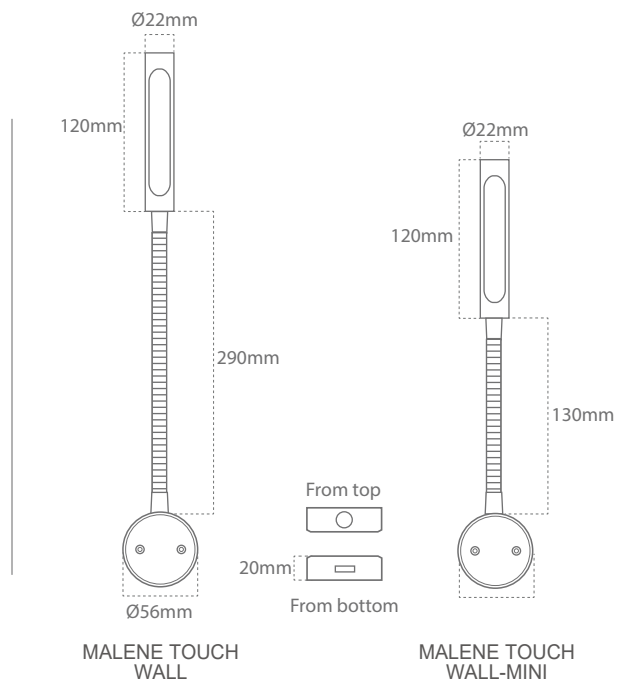

MALENE TOUCH WALL

MALENE TOUCH WALL-MINI

Product code	Lumen output	Beam	Power	CCT	CRI	LED brand	USB Output
MALENE-TOUCH-WALL-10-18VDC	170 lm	110°	0,5 - 2 w	RED - 3000K	> 80	CREE	5V, 2Am
MALENE-TOUCH-WALL-20-28VDC	170 lm	110°	0,2 - 2 w	RED - 3000K	> 80	CREE	5V, 2Am
MALENE-TOUCH-WALL-MINI-10-18VDC	170 lm	110°	0,5 - 2 w	RED - 3000K	> 80	CREE	5V, 2Am
MALENE-TOUCH-WALL-MINI-20-28VDC	170 lm	110°	0,2 - 2 w	RED - 3000K	> 80	CREE	5V, 2Am

Feature

- IP54 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Stainless steel ensures corrosion free product in damp environment
- White LEDs (3000 Kelvin = warm white)
- Switch with touch function at the top of the lamp
- USB charger in lampbase

Material

- Base and head: Stainless steel
- Flex: Stainless steel inner core, brass with chrome outside
- Flex: Also available in other flex tube lengths and in upholstered leather or in colored Polyolefin cover

Benefit

- High reliability
- Maintenance free

Application

- Marine light