

# Casolux Machine light

Machine light system

DREJOE

GB

IP69K




Power  
15-50 w

Efficiency  
110 Lm/w

Lifetime  
50.000 Hours  
(70% Lumen maintenance)

Input  
24 VDC  
200-240 VAC

Material  
Stainless Steel  
/ PC

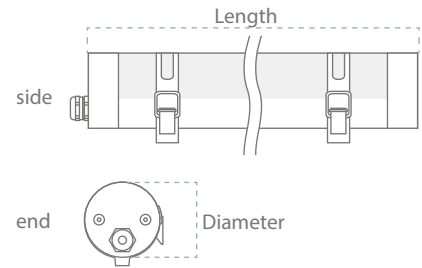

	Diameter	Længde
Trip proof X-small	75mm	300mm
Trip proof small	75mm	600mm
Trip proof medium	75mm	1200mm
Trip proof big	75mm	1500mm

Product code	Lumen output	Beam	Power	CCT	CRI
DREJOE X-SMALL 300MM (24VDC / 230VAC)	1650 lm	120°	15 w	4000	> 80
DREJOE SMALL 600MM (24VDC / 230VAC)	2200 lm	120°	20 w	4000	> 80
DREJOE MEDIUM 1200MM (230VAC)	4400 m	120°	40 w	4000	> 80
DREJOE BIG 1500MM (230VAC)	5500 m	120°	50 w	4000	> 80

## Feature

- Powerful light for indoor or outdoor use.
- IP69K and IK10.
- The lamp is dustproof, waterproof and can withstand high water column pressure and impact force.
- Operating temperature: -20 - +50 °C
- Storage temperature: -40 - +85 °C

## Material

- Stainless Steel end caps and bracket.
- Frosted PC (Polycarbonates)
- Can also be costum made in PP (Polypropylene) and in frosted or clear glass.

## Benefit

- High reliability
- Maintenance free

## Application

- Machine light