


CASOLUX®

The lights of tomorrow

Wall Lamp


Assembly Instructions

ITEM	POWER	VOLT
WALLIS-SS-SMALL-SQ-USB-G4	1,5W	10-30V DC
WALLIS-SS-SMALL-RO-USB-G4	1,5W	10-30V DC
WALLIS-SS-BIG-SQ-USB-G4	1,5W	10-30V DC
WALLIS-SS-BIG-RO-USB-G4	1,5W	10-30V DC

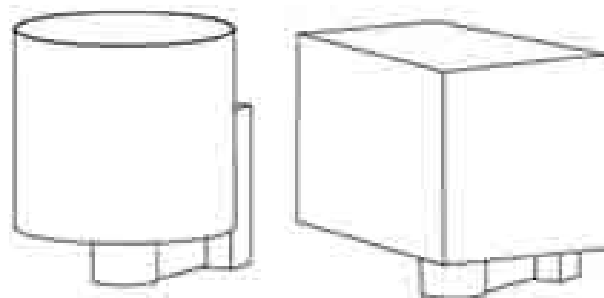


Casolux Aps
 Borrevej 18, 6400 Sønderborg
 Phone: +45 74 45 00 05
www.casolux.com

CONTENTS



1 x Main Body



1 x Shade



1 x Glass Tube



1 x Lamp holder ring



2 x cable connectors



2 x Wall Screws

BEFORE YOU START

It is extremely important that these instructions are read carefully and any illustrations studied before commencing installation. Please retain these instructions for future reference.

WARNING!

- Electricity can be dangerous.
- Do not attempt to fit installation unless you are competent.
- If in any doubt consult a qualified electrician to complete electrical installation.
- Installation to comply with current IET wiring regulations.
- The lighting is for use in a normal dry domestic indoor environment.
- If you find any damage to the electrical parts, please ask a qualified electrician to replace it.

Installation

- Take care when handling and installing to avoid damage to the product.
- Avoid mounting the fitting on a damp surface such as newly painted or plastered area as this may cause discoloration of the finish.

Tools

- Cross headed screwdriver


Cleaning Instructions and Care

- Take extra care when cleaning and assembling.
- Do not use any chemical or abrasive agents to clean the shade.


General Assembly

1. Make sure that the power source is still accessible. Drill the surface to fit the wall light using the metal bracket to locate the holes position. Please ensure that no pipes or cables are within the drilling area.


2. Using the cable connectors to connect to the main power supply as shown below.



3. Screw the metal bracket onto the wall using the selftapping screws and raw plugs if necessary.



5. Insert the bulb into the lampholder screw the glass tube to lampholder fix the glass shade with bracket and tight the screws.

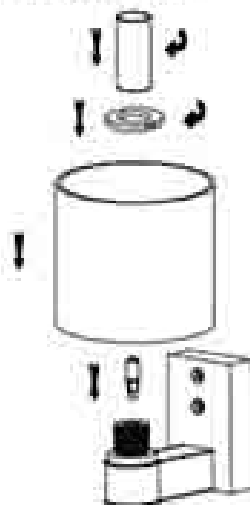

Bulb Replacement

- LED 1.5W 10-30VDC G4 bulb
- Dispose of old bulbs with care.



Your light is now ready for use