

# Casolux Marine light

Marine light system

## LINE - LED Flexible PU Strip - 10x10mm - IP68

GB

IP68



Power  
10 w/m

Efficiency  
800Lm/m


Lifetime  
50.000 Hours  
(70% Lumen maintenance)

Input  
24 VDC




Material  
PU



### Bending Up-Down

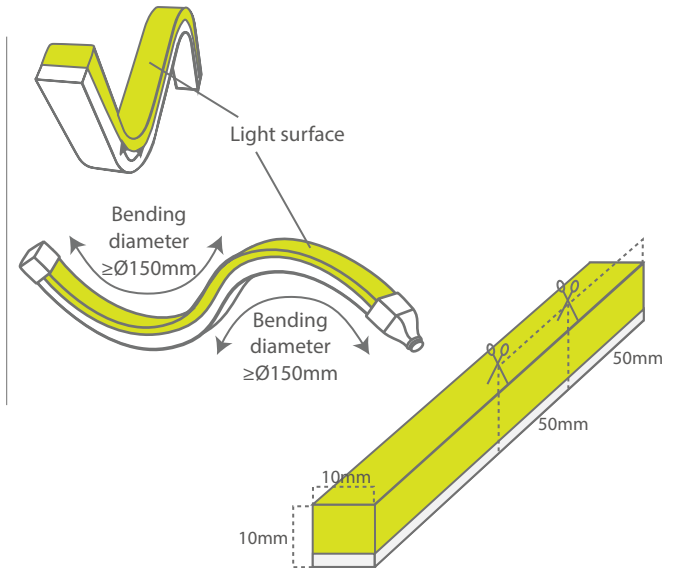

10x10MM-FLEXIBLE-PROFILE

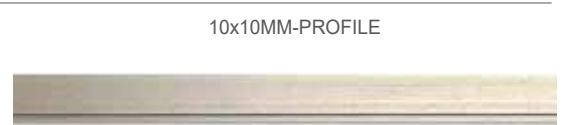

10x10MM-PROFILE

| Product code                           | IP   | Lumen/m  | Beam | Power/m | Volt   | CCT            | CRI  |
|--|------|----------|------|---------|--------|----------------|------|
| CALL24VDC (X)x10x10MMWW (1,2,3,5meter) | IP68 | 750 lm/m | 120° | 10 w/m  | 24 VDC | 3000 K         | > 85 |
| CALL24VDC5000x10x10MMCW                | IP68 | 800 lm/m | 120° | 10 w/m  | 24 VDC | 4500 K         | > 85 |
| CALL24VDC5000x10x10MMRGB               | IP68 | 400 lm/m | 120° | 10 w/m  | 24 VDC | RED-GREEN-BLUE | > 85 |

10x10MM-FLEXIBLE-PROFILE - STAINLESS STEEL-PROFILE IN 5 METER REEL

10x10MM-PROFILE - ALUMINIUM - PROFILE IN 1 METER PIECES

### Feature

- Flexible and cuttable line led strip made of PU (Polyurethane)
- Flexibel strip with a bending diameter of 150mm.
- Saltwater, UV and High temperature resistant.
- Seamless light without shadows.
- Working temperatur -25° - +65°

### Benefit

- High reliability.
- Maintenance free.
- Cut option for every 5 cm for WW/CW and 83mm for RGB line.

### Application

- Marine and Autocamp light indoor / outdoor

### Mounting options:



Standard with SS Clips



Optional Flexibel SS profile



Optional Aluminum profile