

# Casolux Marine light

Marine light system

## MALOU CONTROLLER/RECEIVER - SURFACE MOUNTED

GB

IP20  
IP64  
IP65



Power  
3 W

Efficiency  
45-50 Lm/w

Lifetime  
50.000 Hours  
(70% Lumen maintenance)

Input  
9-32 VDC

Material  
Stainless steel  
Aluminum



Controller Surface



Receiver Surface



Controller IP64 Surface




IP20



IP65



IP64

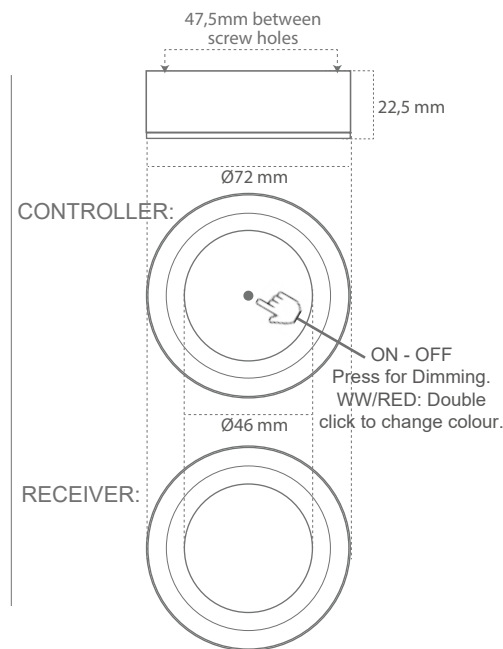

Product code	Front Colour/Quality	IP	Lumen	Beam	Power	Volt	CCT	CRI
CONTROLLER: MALOU-MA-SURFACE-WW	SS	IP20	135	120°	3 W	9-32 VDC	3000 K	> 85
CONTROLLER: MALOU-MA-SURFACE-WW-RED	SS	IP20	135	120°	2 x 3 W	9-32 VDC	3000 K / RED	> 85
CONTROLLER: MALOU-MA-SURFACE-IP64-WW	SS	IP64	135	120°	3 W	9-32 VDC	3000 K	> 85
CONTROLLER: MALOU-MA-SURFACE-IP64-WW-RED	SS	IP64	135	120°	2 x 3 W	9-32 VDC	3000 K / RED	> 85
RECEIVER: MALOU-SL-SURFACE-WW	SS	IP65	150	120°	3 W	9-32 VDC	3000 K	> 85
RECEIVER: MALOU-SL-SURFACE-WW-RED	SS	IP65	150	120°	2 x 3 W	9-32 VDC	3000 K / RED	> 85

### Feature

- Stainless steel (316L) / Anodized aluminum ensures corrosion free product in damp environment.
- All the electronic inside the lamps are sealed to withstand moisture.
- IP64 Controller is made with silicone disk on the On / Off / Dim button for better protection against moisture.
- Toggle and push dimming.
- One Controller can control up to 15 Receivers.
- WW/RED model: Double-click for switch from warm white to red light.

### Material

- Front: Stainless steel 316L
- Back: Aluminium
- Opal lens

### Benefit

- High reliability
- Maintenance free

### Application

- Marine light