

Casolux Marine light

Marine light system

BORNHOLM

DK

IP67



Effekt forbrug
3 w

Ydelse
90 Lm/w


Levetid
50.000 timer
(L70%)

Strømforsyning
350mA/500mA
700mA



Materiale
AISI 316/
Aluminium



BORNHOLM-230-SS-PO

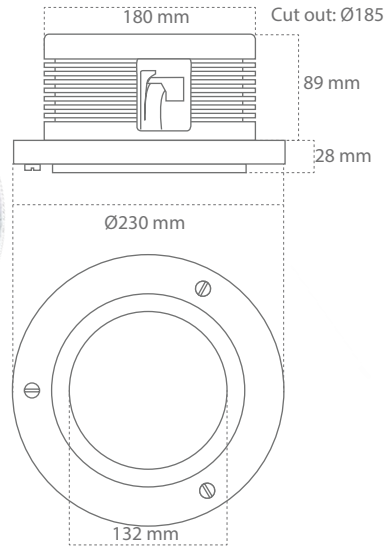

BORNHOLM-100-SS-PO
BORNHOLM-100-SS-PO-40-BEAM

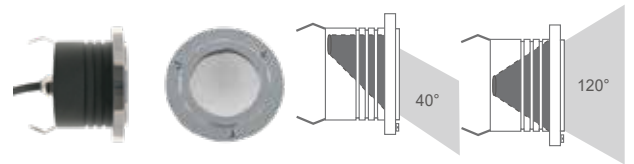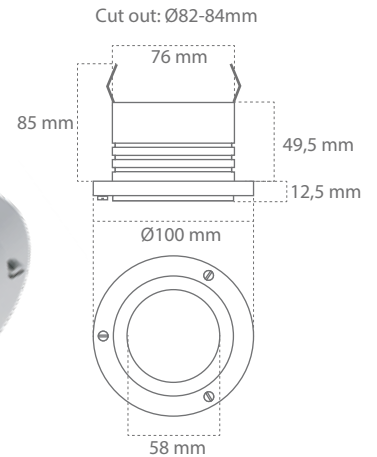

Varenavn	Lumen	Spredning	Effekt forbrug	Farvetemperatur	mA
BORNHOLM-100-SS-PO	270 lm	120°	3 w	2700K	350mA
BORNHOLM-100-SS-PO-40-BEAM	270 lm	40°	3 w	2700K	500mA
BORNHOLM-230-SS-PO	1800 lm	120°	20 w	2700K	700mA

Egenskaber

- Kraftigt lys til marine belysning
- IP67 design med integreret varmestyring for lang levetid
- Høj kvalitets fremstilling sikrer perfekt pasform hvilket sikrer lang levetid
- Køleprofil i anodiseret aluminium sikrer korrosionsfrit produkt i fugtige omgivelser

Materiale

- Front: Rustfrit stål SS316
- Bagside: Anodiseret aluminium
- Mattered linse

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri

Anvendelse

- Marine belysning