

Casolux Marine light

Marine light system

LILLEHOLM 205

DK

IP55



Effekt forbrug
30 w

Ydelse
95 Lm/w


Levetid
50.000 timer
(L70%)

Strømforsyning
230 VAC

Materiale
Aluminium



Cut out: 205 mm

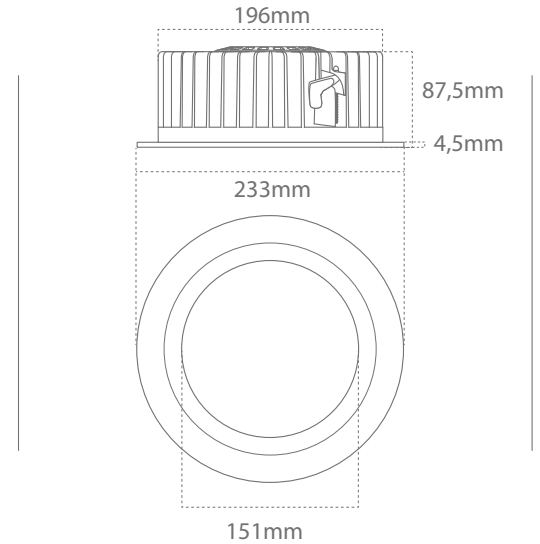

Varenavn	mA	Volt DC	Lumen	Spredning	Effekt forbrug	Farvetemperatur	RA-værdi
LILLEHOLM-205-30W-WW-9003	840mA	48 VDC	2800lm	90°	30 w	3000K	>90
LILLEHOLM-205-30W-WW-9010	840mA	48 VDC	2800lm	90°	30 w	3000K	>90

Egenskaber

- Leveres med led driver
- Kraftigt lys til marine belysning
- IP55 design med integreret varmestyring for lang levetid
- Høj kvalitets fremstilling sikrer perfekt pasform hvilket sikrer lang levetid
- Køleprofil i anodiseret aluminium sikrer korrosionsfrit produkt i fugtige omgivelser
- 0,6 meter 2x0,5mm² kabel
- Kan fås i WH (RAL 9003) eller WH (RAL 9010)

Materiale

- Anodiseret aluminium
- Opal linse

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri

Anvendelse

- Marine belysning