

Casolux Marine light

Marine light system

LILLEHOLM 205

GB

IP55



Power
30 w

Efficiency
95 Lm/w


Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
230 VAC

Material
Aluminum



Cut out: 205 mm

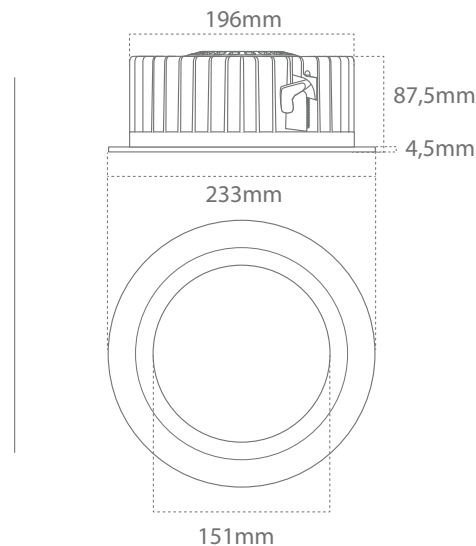

Product code	mA	Volt DC	Lumen output	Beam	Power	CCT	CRI
LILLEHOLM-205-30W-WW-9003	840mA	48 VDC	2800 lm	90°	30 w	3000K	>90
LILLEHOLM-205-30W-WW-9010	840mA	48 VDC	2800 lm	90°	30 w	3000K	>90

Feature

- Is delivered with led driver
- High power projector for marine light
- IP55 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Hard anodized aluminium heatsink ensures corrosion free product in damp environment
- 0,6 meter 2x0,5mm² cable
- Available in WH (RAL 9003) or WH (RAL 9010)

Material

- Anodised aluminium
- Opal lens

Benefit

- High reliability
- Maintenance free

Application

- Marine light