Casolux Marine light

Marine light system

MAX Standard   GB

| IP65 | 60° | **Power** 3,5w / 1w / 1w | **Efficiency** 45 Lm/w | **Lifetime** **40.000 Hours** (70% Lumen maintenance) | **Input** **10-32 VDC** | **Material** **Stainless steel** | C € |

MAX-SS-STANDARD

Ø29mm
Ø50mm
7,5mm
15mm
22,5mm
Ø29mm

Cut out Ø31mm

Front   Side   Mounting brackets   Back
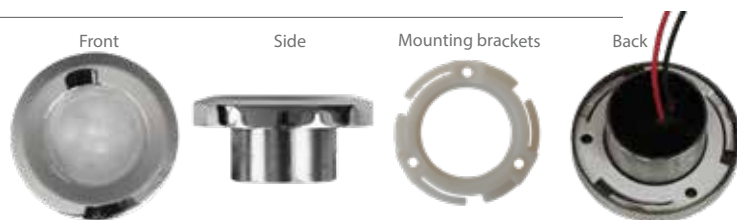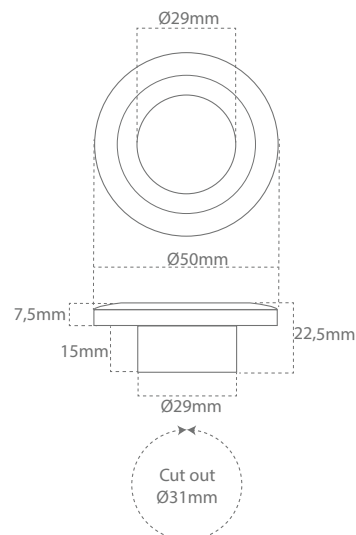
Product code	Lumen output	Beam	Power	CCT	CRI
MAX-SS-10-32V-WW-R-B	162 lm	60°	3,5w / 1w / 1w	3000K + RED + BLUE	> 85

Feature

- IP65 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Stainless steel ensures corrosion free product in damp environment
- Start with Red light On / Off, Blue light On / Off, White light On / Off.
- SPST and PWM dimable in all colours.

Material

- AISI 316 Stainless steel
- Milky/Frosted glass

Benefit

- High reliability
- Maintenance free

Application

- Marine light