Casolux Marine light

Marine light system

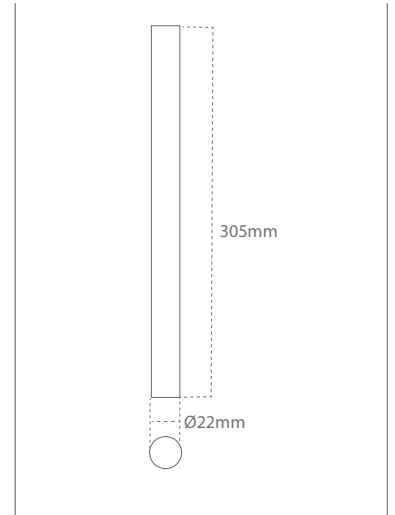| IP20 | 120° | Power 2,3 w | Efficiency 87 Lm/w | Lifetime 40.000 Hours (70% Lumen maintenance) | Input 5 VDC | Material Aluminum | C€ |

Bottom w/charger input

Top w/Touch

Brakcet for screw, with magnet or 3M tape

305mm

Ø22mm

Product code	Lumen output	Beam	Power	CCT	Battery	Input
CABINET-ROUND-SILVER	200 lm	120°	2,3w	3000K to 6000K	3,7V, 2000mAh	5V

Feature

- IP20 design with integral thermal management for long life.
- Working temperature -25° - +40°.
- Touch swith in end of stick.
- Dimming 3000K - 4000K - 6000K.
- With flashing lights function.
- With bracket for screw, glue and magnet.
- Charged from adapter 5V 1A, from powerbank or from computer to micro USB output

Short touch =
1 - ON   4000K
2 - CCT   6000K
3 - CCT   3000K
4 - Flashing light
5 - OFF
Long press =   Stepless dimming.

Material

- Lithium battery
- Aluminium tube

Benefit

- High reliability
- Maintenance free

Application

- Marine cabinet light.

Charged from

Adapter 5V 1A

Powerbank

Laptop