

Casolux Marine light

Marine light system

MALOU 82

GB

IP65



Power
4,5 w

Efficiency
75 -95 Lm/w


Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
10-32 VDC

Material
Stainless steel
Aluminum




MALOU-SS-10-32VDC

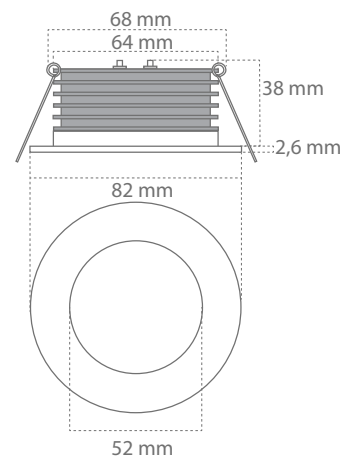


MALOU-SS-RO




MALOU-SS-BL-RO



MALOU-SS-WH-RO



MALOU-SS-SQ-RECT



MALOU-SS-SQ-OVAL

Varenavn	Front	Lm/w	Lumen	Spredning	Volt	Effekt forbrug	Farvetemperatur	RA-værdi
MALOU-SS-10-32VDC-WW	SS / SS-BL / SS-WH	95	425	120°	10-32 VDC	4,5 w	3000 K	> 85
MALOU-SS-10-32VDC-WW-RED	SS / SS-BL / SS-WH	95	342	120°	10-32 VDC	3,6 w / 0,6 w	3000 K / RED	> 85

Feature

- Stainless steel (316) / Anodized aluminum ensures corrosion free product in damp enviroment.
- High power projector for marine light
- IP65 design with integral thermal management for long life
- PWM dimmable.
- Also available with square Stainless steel front.

Material

- Front: Aisi 316 stainless steel, mirror polished
- Back: Anodised aluminium


Benefit

- High reliability
- Maintenance free

Application

- Marine light

MALOU-SS-SQ-OVAL
FRAME



82 mm

MALOU-SS-SQ-RECT
FRAME

