

IP20



Power
2 w

Efficiency
77 Lm/w

Lifetime
30.000 Hours
(70% Lumen maintenance)


Input
10-30 VDC
9-32 VDC

Material
Stainless Steel
Aluminium



Flex in 130 / 200 / 290

Check table below for differen flex solutions

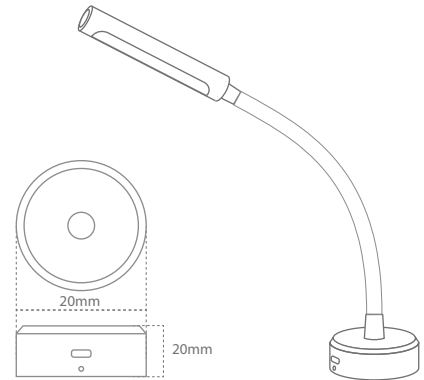

Product code	Lumen output	Beam	Power	CCT	USB Output
MALENE-SL-BL-TABLE	140 lm	110°	RED 0,5 w / WW 2 w	3000K	5V, 2Am
MALENE-SL-WH-TABLE	140 lm	110°	RED 0,5 w / WW 2 w	3000K	5V, 2Am
MALENE-SL-WH-TABLE-WW	140 lm	110°	2 w	3000K	5V, 2Am

Feature

- Anodised aluminium ensures corrosion free product in damp enviroment.
- IP20 design with integral thermal management for long life.
- High precision machining ensures perfect mechanical fit for long life.
- Switch with touch and dimming function in lamp base.
- Memory: Remembers your last setting after being turned off.
- With USB C charger in base.

Material

- Base and head: Black anodised aluminium.
- Flexarm: Black silicone cover.

Benefit

- High reliability
- Maintenance free

Application

- Marine light

