
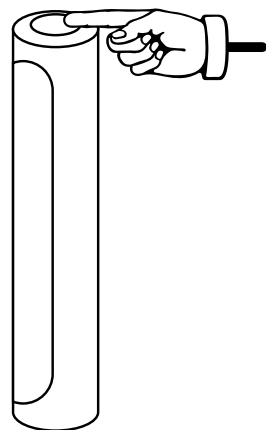


Electrical diagram

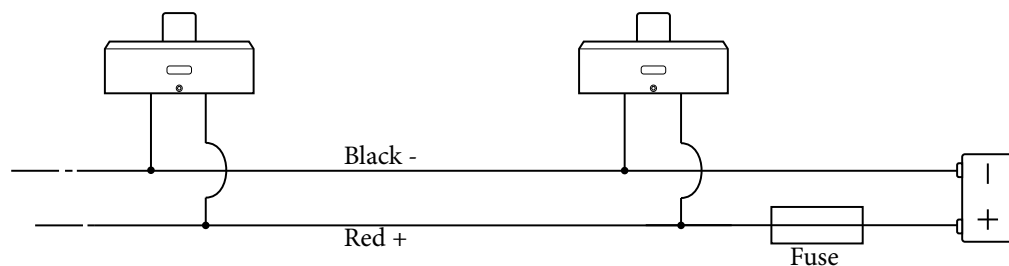


Touch switch to change between white and red light.

Hold for dimming on white light

Dimming function remembers your last setting after being turned off.

USB C charger in base.

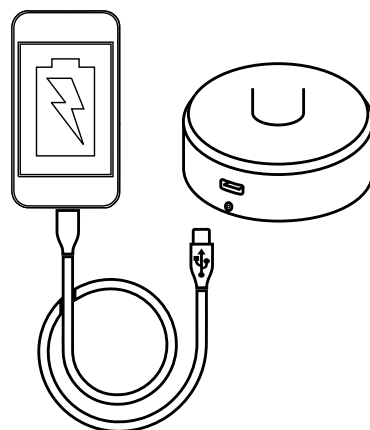

www.casolux.com

CASOLUX®

The lights of tomorrow


January 2025

MALENE-SL

Table Light

Assembly instruction

Item	Power	Input
MALENE-SL-BL-TABLE	WW 2W / RED 0,5W	10-29V DC
MALENE-SL-WH-TABLE	WW 2W / RED 0,5W	9-32V DC
MALENE-SL-WH-TABLE-WW	WW 2W	9-32V DC

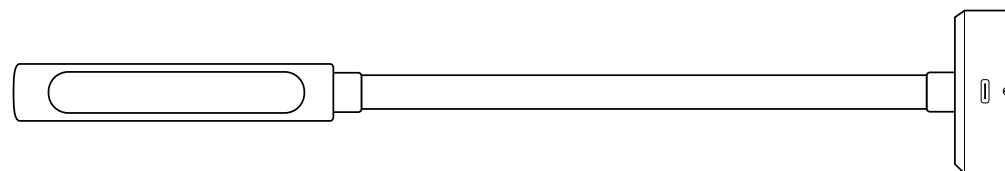

Casolux Aps
Borrevej 18, 6400 Sønderborg
Phone: +45 7445 0005
www.casolux.com

BEFORE YOU START

Safety information

Read all safety information before using the device to ensure safe and proper use.

The light source of this light fixture is not replaceable, when the light source reaches its end of life the whole unit shall be replaced.

It is extremely important that these instructions are read carefully, and any illustrations studied before commencing installation.

Please keep these instructions for future reference.

WARNING!

- Electricity can be dangerous.
- Do not attempt to fit installation unless you are competent.
- If in any doubt consult a qualified electrician to complete electrical installation.
- Installation to comply with current IET wiring regulations.
- If you find any damage to the electrical parts, please ask a qualified electrician.
- Be aware of electrical voltage on the different models to avoid damage.

Correct disposal



This marking indicates that this item should be disposed of separately from household waste. The item should be handed in for recycling in accordance with local environmental regulations for waste disposal.


Cleaning Instructions and Care

- Please disconnect the light before cleaning.
- Take extra care when cleaning and assembling.
- Do not use any chemical or abrasive solutions.


Installation

- Take care when handling and installing to avoid damage to the product.
- Avoid mounting the fitting on a damp surface such as newly painted or plastered area as this could cause discoloration of the finish.


General Assembly

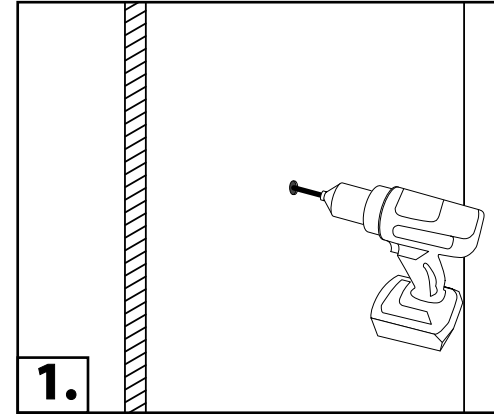


1. Cut out a hole to route the cable through.

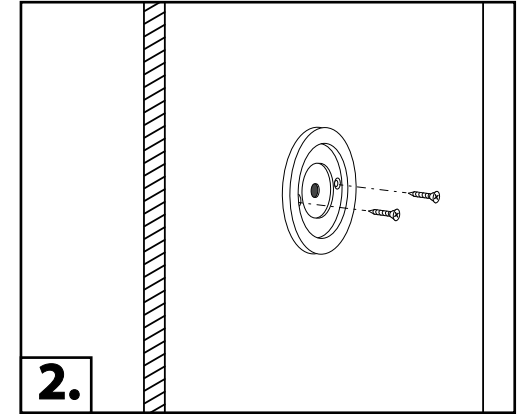

2. Screw in the mounting bracket around the hole with the included screws.

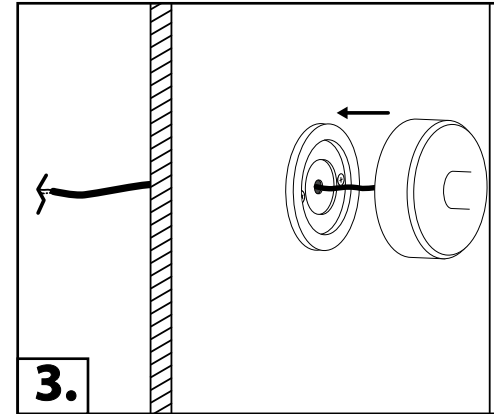

3. Route the cable through the hole and connect according to the electrical diagram.

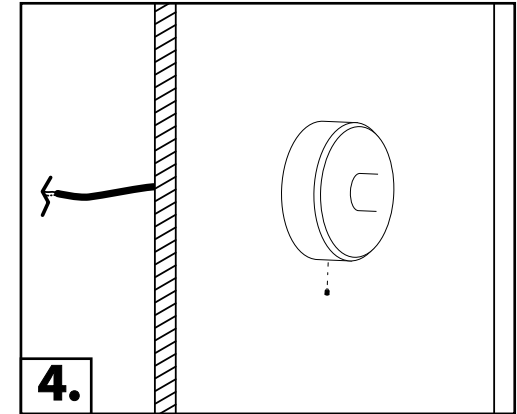

4. Place the light on the mounting bracket and screw in the included pinion screw to finish installation.