

Casolux Marine light

Marine light system

MERLE


GB

IP67		Power 0,5 w	Efficiency 80 Lm/w	Lifetime 30.000 Hours (70% Lumen maintenance)	Input 10-18 VDC 10-30 VDC 18-30 VDC	Material Stainless steel	CE
------	---	----------------	-----------------------	---	--	-----------------------------	----

MERLE FRONT



MERLE DOWN

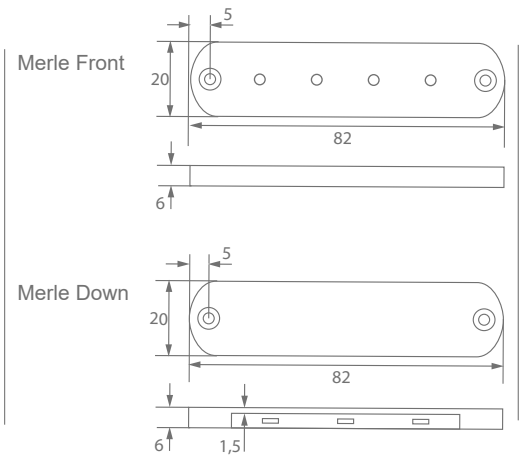

MERLE FRONT - back



MERLE DOWN - back

Product code	IP	Lumen	Beam	Power	Volt	CCT
MERLE-FRONT-3000K	IP67	40	40°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	3000K
MERLE-FRONT-RED	IP67	40	40°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	RED
MERLE-FRONT-BLUE	IP67	40	40°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	BLUE
MERLE-DOWN-3000K	IP67	40	120°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	3000K
MERLE-DOWN-RED	IP67	40	120°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	RED
MERLE-DOWN-BLUE	IP67	40	120°	0,5W	10-18V DC / 18-30V DC / 10-30V DC	BLUE
MERLE-DOWN-DUO	IP67	40	120°	0,5W/0,5W	10-18V DC / 18-30V DC	3000K + RED

Feature

- Stainless steel (316) ensures corrosion free product in damp enviroment.
- Courtesy lighting for marine use
- IP67 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- LED light colour available in white, red or blue
- Dimmable with external PWM.

Manuals

- The light comes with a different manual based on the input voltage
- Manual A is for 10-30V DC
- Manual B is for 10-18V DC
- Manual C is for 18-30V DC

Material

- Aisi 316 stainless steel

Benefit

- High reliability
- Maintenance free

Application

- Marine light