

Casolux Marine light

Marine light system

CLEO

GB

IP65



Power
0,6 w

Efficiency
15 Lm/w

Lifetime
35.000 Hours
(70% Lumen maintenance)

Input
10-32 VDC

Material
Stainless steel



CLEO ROUND (SS)



SS-WH



SS-BL



CLEO SQUARE (SS)



SS-WH



SS-BL



CLEO ROUND 25° (SS)



SS-WH



SS-BL





CLEO SQUARE 34° (SS)



SS-WH



SS-BL

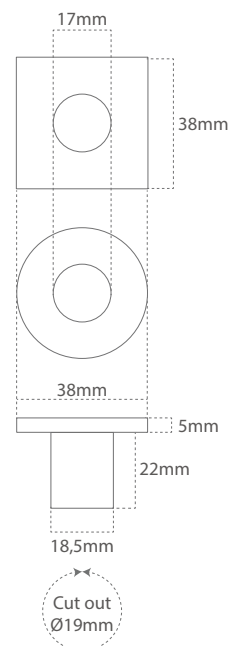

Side

Back (ROUND)



Back (SQUARE)



Mounting bracket



Product code	Front Colour/Quality	IP	Lumen	Beam	Power	Volt	CCT	CRI
CLEO ROUND	SS / SS-WH / SS- BL	IP65	9	65°	0,6 W	10-32 VDC	3000 K	> 85
CLEO ROUND 25	SS / SS-WH / SS- BL	IP65	9	25°	0,6 W	10-32 VDC	3000 K	> 85
CLEO ROUND 25 2700K	SS / SS-WH / SS- BL	IP65	9	25°	0,6 W	10-32 VDC	2700 K	> 85
CLEO SQUARE	SS / SS-WH / SS- BL	IP65	9	65°	0,6 W	10-32 VDC	3000 K	> 85
CLEO SQUARE 34	SS / SS-WH / SS- BL	IP65	9	34°	0,6 W	10-32 VDC	3000 K	> 85

Feature

- Courtesy and orientation lighting.
- Stainless steel ensures corrosion free product in damp enviroment.
- IP65 design sealed to withstand moisture.
- Dimmable with external PWM.

Material

- Front: SS316L Stainless steel
- Plastic mounting module
- Plastic mounting bracket with 3M VHB Tape

Benefit

- High reliability
- Maintenance free

Application

- Marine light

