

MARY UP/DOWN

DK

IP20



Effekt forbrug
2x3 W
2x5 W

Ydelse
83 Lm/w

Levetid
50.000 timer
(L70%)

Strømforsyning
10-30 VDC
500mA / 24 V DC

Materiale
Aluminium
Rustfri stål




Mary Up/Down
Sort (BL)



Mary Up/Down
Sort (BL)
med SS hylster



Mary Up/Down
Sølv (SI)
Ingen Switch

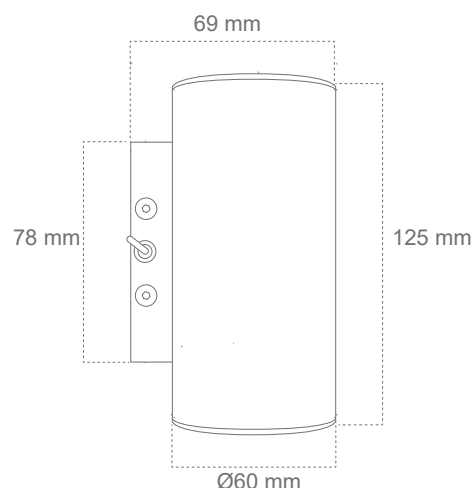

Varenavn	Lumen	Spredning	Effekt forbrug	Volt	Farvetemperatur	RA-værdi
MARY-AL-BL-UP-DOWN	2 x 250 lm	60°	2 x 3W	10-30 VDC	3000 K	> 85
MARY-SS-UP-DOWN	2 x 250 lm	60°	2 x 3W	10-30 VDC	3000 K	> 85
MARY-AL-SI-UP-DOWN	2 x 415 lm	60°	2 x 5W	500mA / 24 V	3000 K	> 85

Egenskaber

- IP20 design med integreret varmestyring for lang levetid
- Høj kvalitets fremstilling sikrer perfekt pasform hvilket sikrer lang levetid
- Køleprofil i anodiseret aluminium sikrer korrosionsfrit produkt i fugtige omgivelser

Materiale

- Anodiseret aluminium
- Rustfri Stål

Fordele

- Høj driftsikkerhed
- Vedligeholdelsesfri

Anvendelse

- Marine belysning