

MARY UP/DOWN

GB

IP20



Power
2x3 w
2x5w

Efficiency
83 Lm/w

Lifetime
50.000 Hours
(70% Lumen maintenance)

Input
10-30 VDC
500mA / 24 V DC

Material
Aluminium
Stainless steel




Mary Up/Down
Black (BL)



Mary Up/Down
Black (BL)
With SS Case



Mary Up/Down
Silver (SI)
No Switch

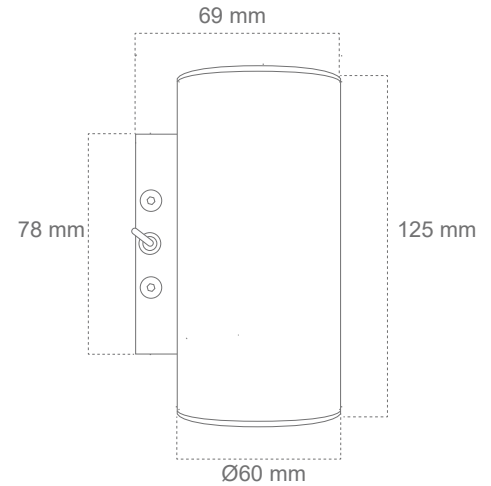

Varenavn	Lumen	Beam	Power	Volt	CCT	CRI
MARY-BL-UP-DOWN	2 x 250 lm	60°	2 x 3W	10-30 VDC	3000 K	> 85
MARY-SS-UP-DOWN	2 x 250 lm	60°	2 x 3W	10-30 VDC	3000 K	> 85
MARY-SI-UP-DOWN	2 x 415 lm	60°	2 x 5W	500mA / 24 V	3000 K	> 85

Feature

- IP20 design with integral thermal management for long life
- High precision machining ensures perfect mechanical fit for long life
- Anodized aluminium heatsink ensures corrosion free in damp environment

Material

- Anodized aluminium
- Stainless Steel

Benefit

- High reliability
- Maintenance free

Application

- Marine light